


Geoweb Single Risk Assessment Report

09/28/2020


Single Risk Assessment Report

Risk Location	New York, USA
Longitude/Latitude	-74.0071E, 40.7146N
Munich Re Risk Location Quality	Coordinates (100)
People per km²	Class 5: ≥ 200
Elevation	64m
Distance to Coast	662m
Distance to Fault	> 50 km

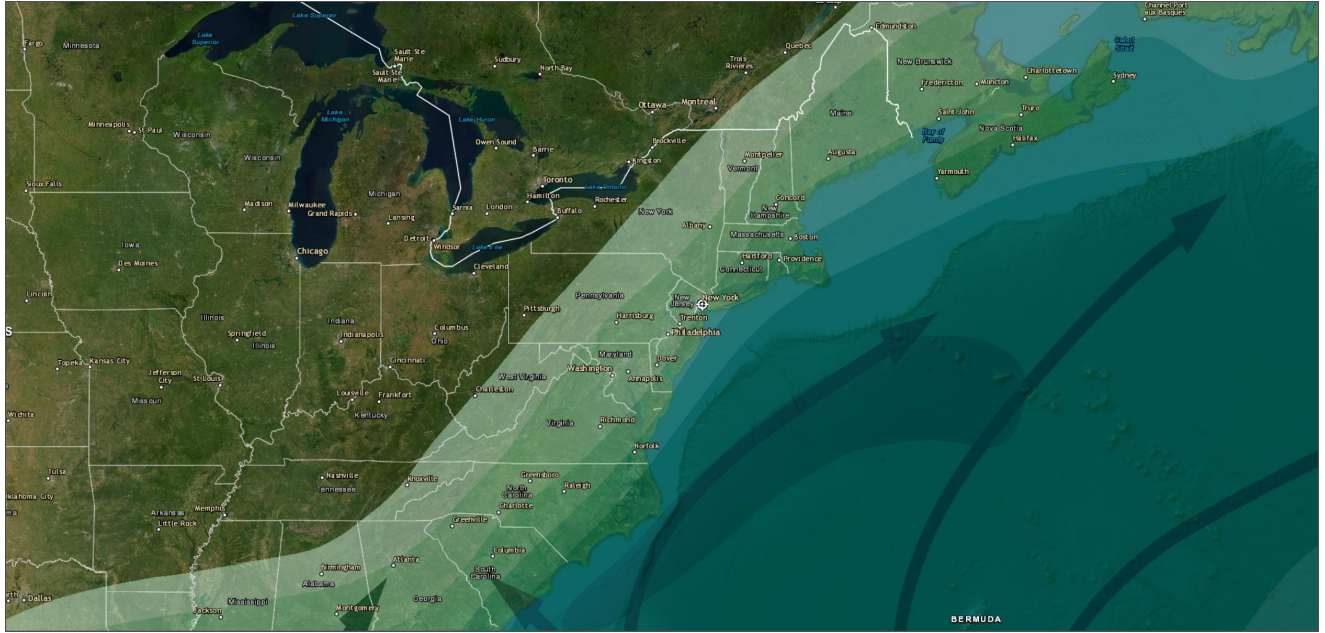


© Copyright 2019 Münchener Rückversicherungs-Gesellschaft Aktiengesellschaft in München ("Munich Re"). All rights reserved.

Risk Scores

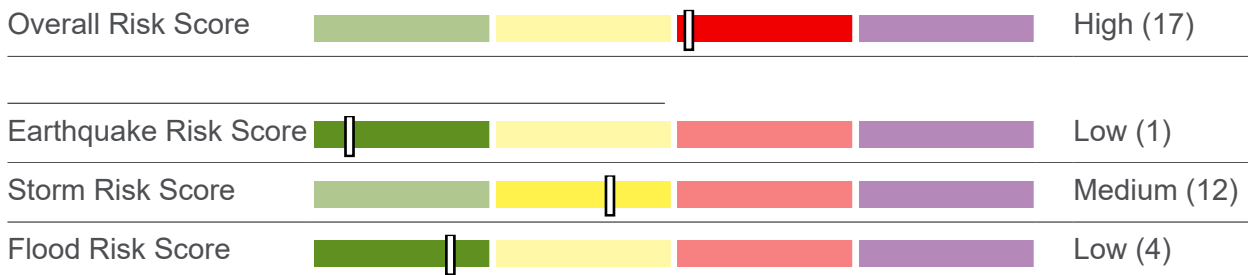

Hazard Scores

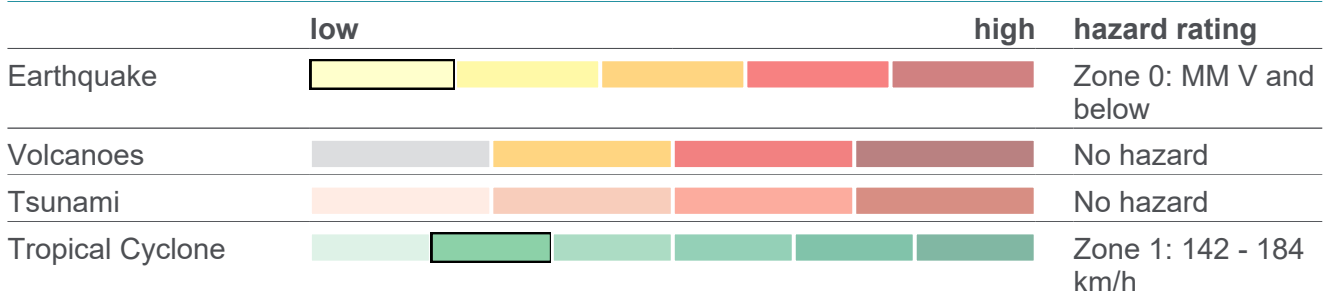

Extratropical Storm		Zone 1: 81 - 120 km/h
Hail		Zone 3:
Tornado		Zone 3:
Lightning		Zone 3: 4 - 10
River Flood		0
Flash Flood		Zone 4
Storm Surge		No hazard
Wildfire		No hazard

Additional Information

	low	high	hazard rating
Soil and Shaking			Class 4 - Stiff Soil

Legend

Overall Risk Score

- Low
- Medium
- High
- Extreme

The overall risk score includes on all provided NATHAN hazard scores with different weights in combination of an annual loss value for standard industrial business. It has to be taken into account that the wildfire score was not taken into account for the Risk Score split. This could cause small deviations between the overall Risk Score value and the sum of the individual Earthquake, Storm and Flood Risk Score.

Flood Risk Score

- Low
- Medium
- High
- Extreme

Includes River flood, Flash Flood and Storm Surge Risk.

Tsunami

- No Hazard
- Zone 0 minimal flood risk
- Zone 1000 year return period
- Zone 500 year return period
- Zone 100 year return period

Zones based on 100m SRTM (Version 4.1) elevation model, taking into account height above sea level and distance from coasts.

Hail

- Zone 1: low
- Zone 2:
- Zone 3:
- Zone 4:
- Zone 5:
- Zone 6: high

Frequency and intensity of hailstorms.

River Flood

- 0
- 500
- 100

Areas threatened by extreme floods. JBA flood maps with return periods of 100 and 500 years.

Earthquake Risk Score

- Low
- Medium
- High
- Extreme

Includes the Earthquake, Volcano and Tsunami Risk.

Earthquake

- Zone 0: MM V and below
- Zone 1: MM VI
- Zone 2: MM VII
- Zone 3: MM VIII
- Zone 4: MM IX and above

Probable maximum intensity (MM: modified Mercalli scale) with an exceedance probability of 10% in 50 years (equivalent to a „return period“ of 475 years) for medium subsoil conditions.

Tropical Cyclone

- Zone 0: 76 - 141 km/h
- Zone 1: 142 - 184 km/h
- Zone 2: 185 - 212 km/h
- Zone 3: 213 - 251 km/h
- Zone 4: 252 - 299 km/h
- Zone 5: ≥ 300 km/h

Probable maximum intensity with an exceedance probability of 10% in 10 years (equivalent to 'return period' of 100 years).

Tornado

- Zone 1: low
- Zone 2:
- Zone 3:
- Zone 4: high

Frequency and intensity of tornados.

Flash Flood

- Zone 1: low
- Zone 2
- Zone 3
- Zone 4
- Zone 5
- Zone 6: high

Frequency and intensity of flash floods.

Storm Risk Score

- Low
- Medium
- High
- Extreme

Includes the Tropical cyclone, Extratropical storm, Hail, Tornado and Lightning Risk.

Volcanoes

- No Hazard
- Unclassified
- Zone 1: Minor hazard
- Zone 2: Moderate hazard
- Zone 3: High hazard

Secondary effects that can occur as a result of the large-scale distribution of volcanic particles (e.g. climate impacts, supraregional ash deposits) are not considered

Extratropical Storm

- No Hazard
- Zone 0: ≤ 80 km/h
- Zone 1: 81 - 120 km/h
- Zone 2: 121 - 160 km/h
- Zone 3: 161 - 200 km/h
- Zone 4: > 200 km/h

Probable maximum intensity with an average exceedance probability of 10% in ten years (equivalent to a „return period“ of 100 years). Areas were examined in which there is a high frequency of extratropical storms (approx. 30°–70° north and south of the equator).

Lightning





- Zone 1: 0,2 - 1
- Zone 2: 1 - 4
- Zone 3: 4 - 10
- Zone 4: 10 - 20
- Zone 5: 20 - 40
- Zone 6: 40 - 80

Global frequency of lightning strokes per km² and year. Lightning frequency is determined by counting the total number of lightning flashes independently of whether they strike the ground or not.







Storm Surge

- No Hazard
- Zone 1000 year return period
- Zone 500 year return period
- Zone 100 year return period






Detailed calculation for coasts and the shores of large lakes. Zones based on 30m ALOS Digital Elevation Model (DEM), taking into account wind speed and bathymetry (underwater depth of lake or ocean floors). Does not consider dykes.

Wildfire	
	No hazard
	Zone 1: low
	Zone 2
	Zone 3
	Zone 4: high

The effects of wind, arson and fire-prevention measures are not considered.

Soil and Shaking	
	Class 1 - Low: Hard Bedrock
	Class 2 - Rock
	Class 3 - Soft Rock/dense soil
	Class 4 - Stiff Soil
	Class 5 - Soft Soil
	Class 6 - High: Reclaimed Land

Underground conditions influencing earthquake intensity (based on geological, soil and hydrological information).

Population Density	
	Class 1: Unpopulated
	Class 2: 1 - 9
	Class 3: 10 - 49
	Class 4: 50 - 199
	Class 5: ≥ 200

People per km² (2016); The population density represents a 24-hour average value. This means that the figures include daily movements, such as commuter journeys, and not just the night-time population.

© Copyright 2019 Münchener Rückversicherungs-Gesellschaft Aktiengesellschaft in München ("Munich Re"). All rights reserved.

Disclaimer: Whilst Munich Re has made every effort to ensure the accuracy of the report, the report is provided "as is" and Munich Re expressly disclaims, on behalf of itself and any and all of its providers, licensors, employees and agents, any and all warranties, express or implied, relating to the report or the results to be obtained from the use of the report including without limitation (i) any and all warranties as to the accuracy, completeness, timeliness or non-infringing nature of the reports and (ii) any and all warranties of reasonable care, merchantability or fitness for a particular purpose.